MEMBRAPOR SPECIFICATION SHEET

Acid/M-100

provisional



Acid Gas Sensor in Mini Housing

MEASUREMENT		
Operation Principle	3-Electrode Electrochemical	
Nominal Range	0 – 100 ppm	
Maximum Overload	200 ppm	
Inboard Filter	_	
Output Signal	-90 ± 60 nA/ppm	
Resolution (Electronics dependent)	< 1 ppm	
T80 Response Time	< 60 sec	
Typical Baseline Range (pure air, 20°C)	-2 ppm to 1 ppm	
Maximum Zero Shift (+20°C to +40°C)	N.D.	
Repeatability	< 2 % of signal	
Output Linearity	Linear	
Gain	_	

ELECTRICAL

Rec. Load Resistor	10 Ohm
Bias (V_Sens-V_Ref)	not recommended
Conformity to RoHS directive	RoHS Compliance

ENVIRONMENTAL


Relative Humidity Range	15 % to 90 % R.H. non- condensing
Temperature Range	-40 °C to 50 °C
Pressure Range	Atmospheric ± 10%
Pressure Coefficient	N.D.
Humidity Effect	none

LIFETIME

Expected Operation Life	2 years in air
Expected Long Term Output Drift in air	N.D.
Filter Life	_
Storage Life	6 months in container
Rec. Storage Temperature	5 °C – 20 °C
Warranty Period	12 months from date of dispatch

Performance data conditions: 20 °C, 50% RH, 1013 mbar

Miniature-Size Outline Dimensions

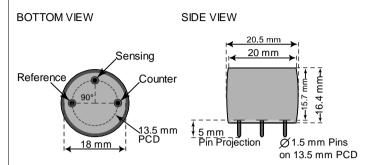

± 0.10 mm

MECHANICAL

Weight	5.5 g
Position Sensitivity	None

APPLICATIONS

Discontinuous Measurement Safety and Environmental Control

CROSS-SENSITIVITY DATA

The table below does not claim to be complete. Interfering gases should not be used for calibration.

Conc.	Reading
ppm	ppm
5	45
80	-12
150	0
	ppm 5 80

REV.: 01/2018 Page 1 of 1

Phone: +41 43 311 72 00

Fax: +41 43 311 72 01

Email: info@membrapor.ch

www.membrapor.ch

MEMBRAPOR AG

Birkenweg 2

CH-8304 Wallisellen

Switzerland

The data contained in this document is for guidance only. Membrapor AG accepts no liability for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.